


ilektro Premium Range

1650 Landscape

SPECIFICATION SHEET

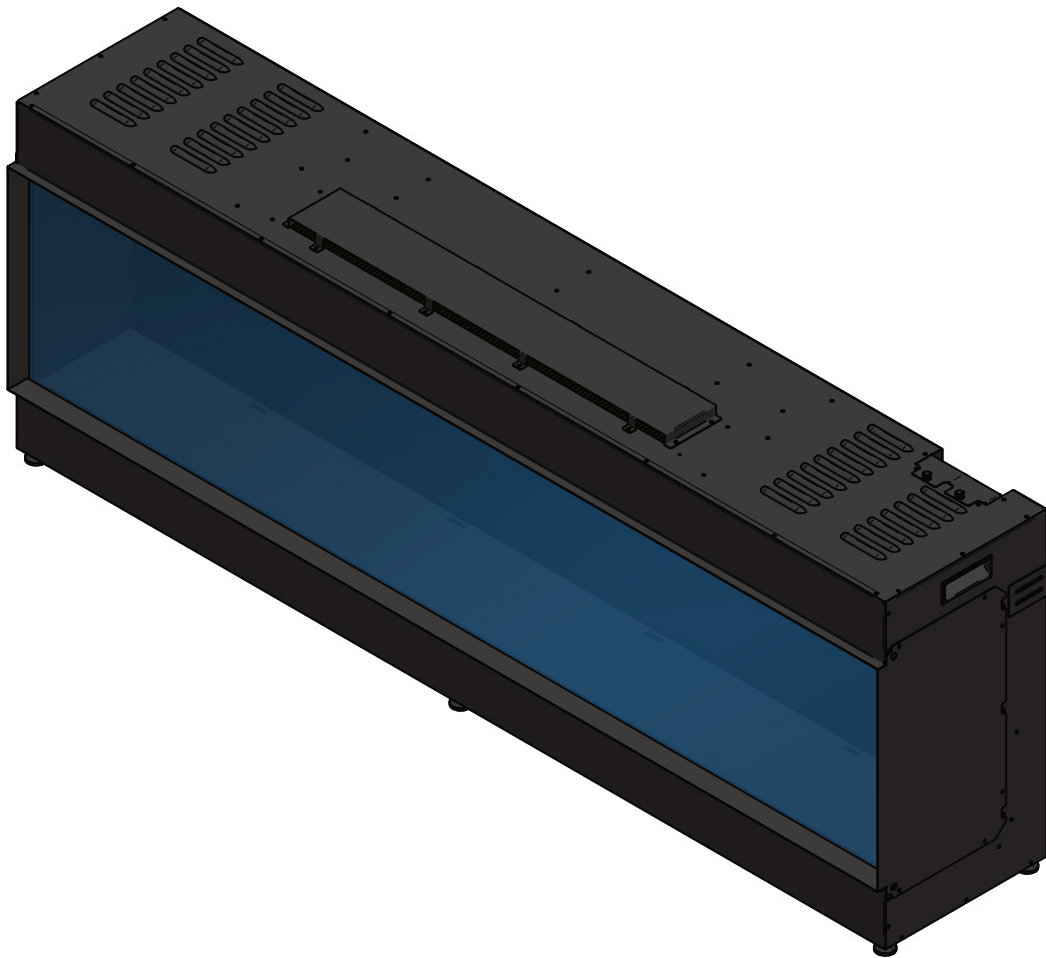


Version 1 20/04/26
Contents of manual may be updated without notice.
For the latest version of this manual please refer to
our website: www.paulagnewdesigns.com.au

PAUL AGNEW | **DESIGNS**

ilektrø 1650 Landscape Glass Fronted


APPLIANCE DIMENSIONS

Product Code:

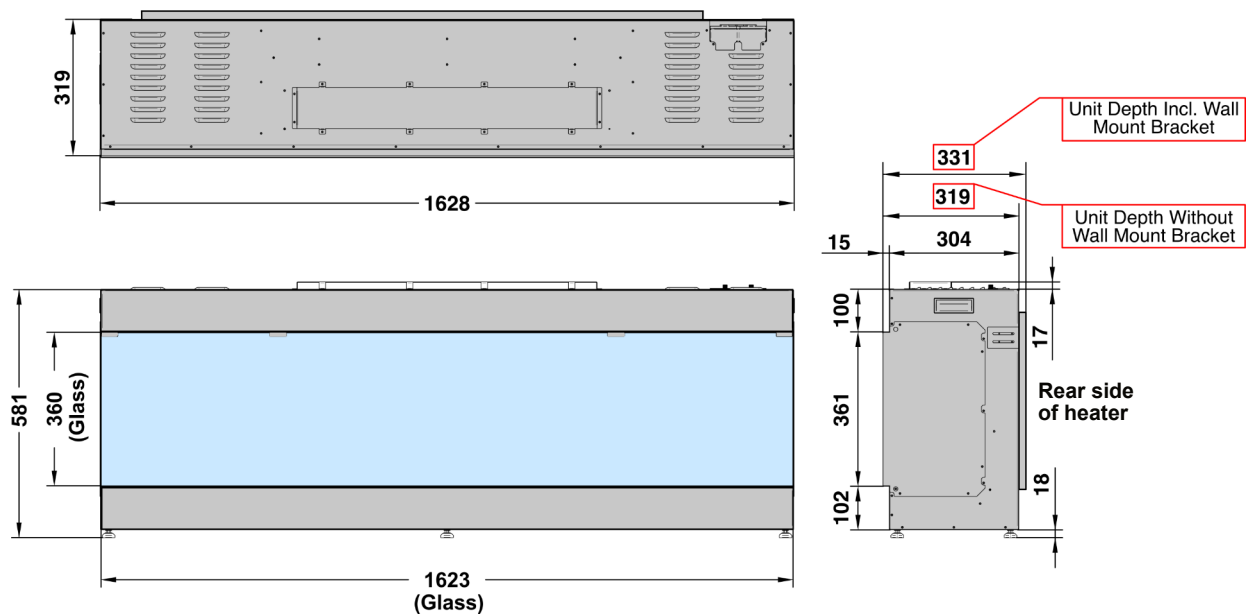

FRAME BUILD OUT DIMENSIONS (All dimensions are in millimetres)

H - MIN	W - MIN	C - CAVITY DEPTH WITHOUT WALL MOUNT BRACKET	C* - CAVITY DEPTH WITH WALL MOUNT BRACKET
631	1632	329	341

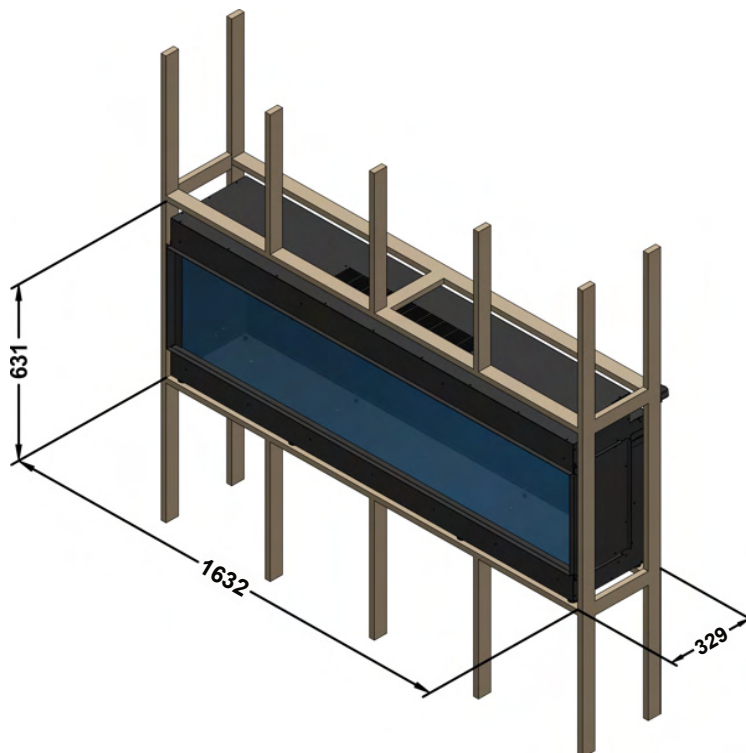**NOTES:**

C- CAVITY DEPTH INCLUDES 10MM REAR CLEARANCE.

H- HEIGHT INCLUDES 50MM TOP CLEARANCE.


REFER USER MANUAL FOR INSTRUCTION ON HOW TO INSTALL OR REMOVE THE WALL MOUNT BRACKET.

PLEASE NOTE: DIMENSIONS ARE FOR REFERENCE ONLY - CONSULT YOUR INSTALLER AND RETAILER FOR GUIDANCE

ilektro 1650 Landscape Bay


APPLIANCE DIMENSIONS

Product Code:

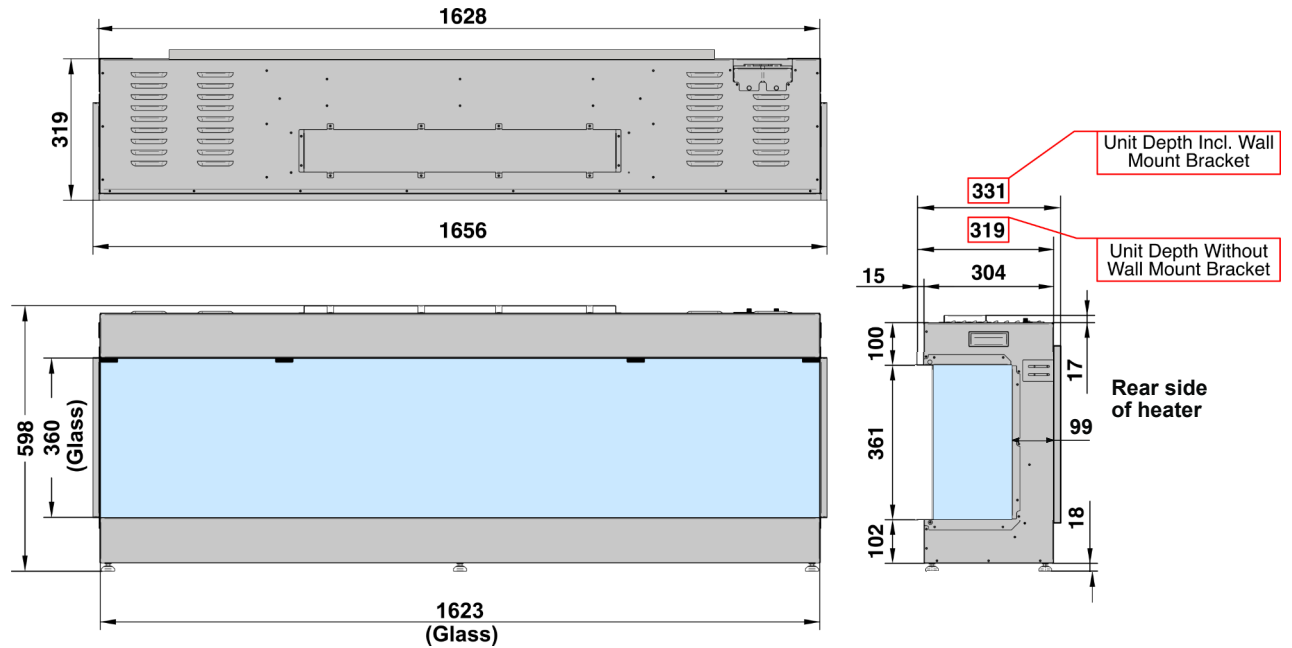

FRAME BUILD OUT DIMENSIONS (All dimensions are in millimetres)

H - MIN	W - MIN	C - CAVITY DEPTH WITHOUT WALL MOUNT BRACKET	C* - CAVITY DEPTH WITH WALL MOUNT BRACKET
631	1632	329	341

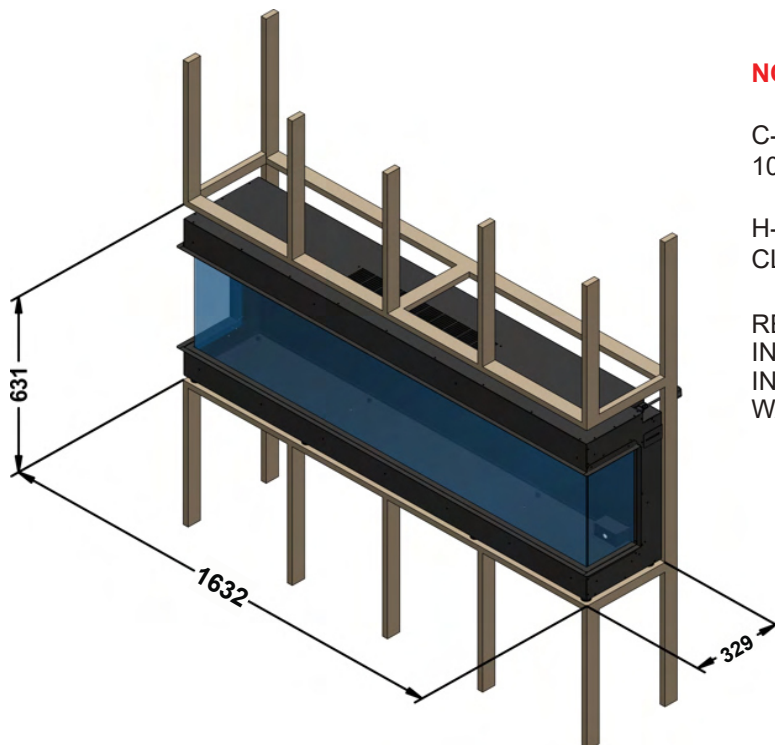**NOTES:**

C- CAVITY DEPTH INCLUDES 10MM REAR CLEARANCE.

H- HEIGHT INCLUDES 50MM TOP CLEARANCE.


REFER USER MANUAL FOR INSTRUCTION ON HOW TO INSTALL OR REMOVE THE WALL MOUNT BRACKET.

PLEASE NOTE: DIMENSIONS ARE FOR REFERENCE ONLY - CONSULT YOUR INSTALLER AND RETAILER FOR GUIDANCE

ilektrö 1650 Landscape Left Corner Glass


APPLIANCE DIMENSIONS

Product Code:

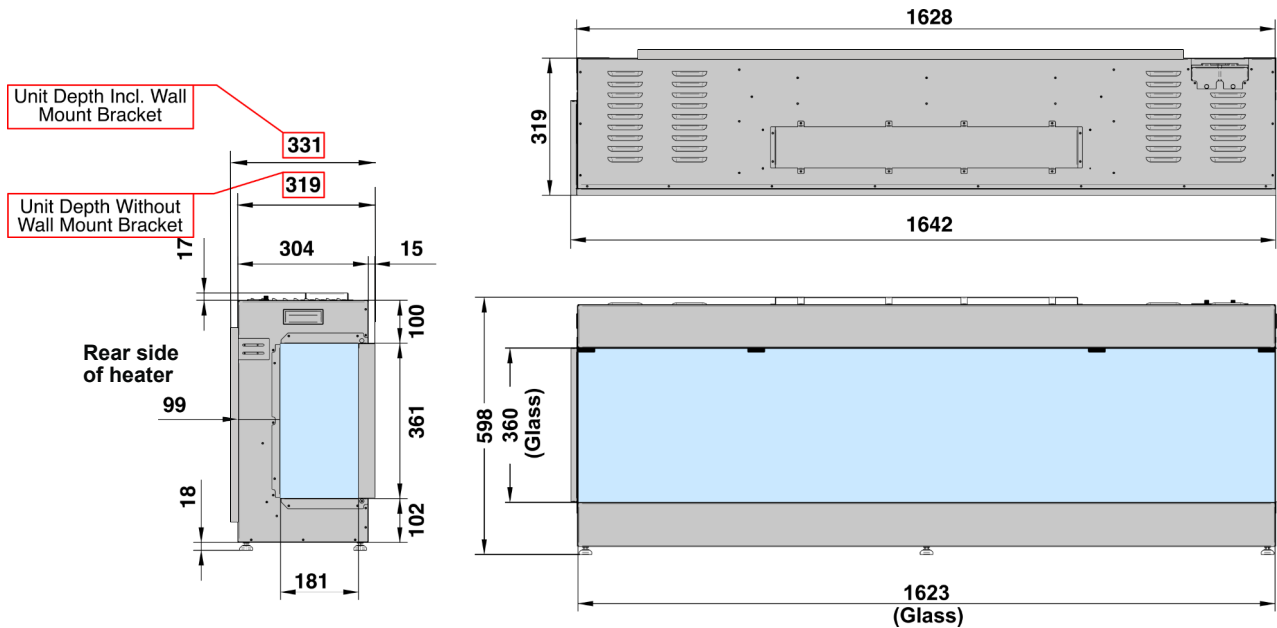

FRAME BUILD OUT DIMENSIONS (All dimensions are in millimetres)

H - MIN	W - MIN	C - CAVITY DEPTH WITHOUT WALL MOUNT BRACKET	C* - CAVITY DEPTH WITH WALL MOUNT BRACKET
631	1632	329	341

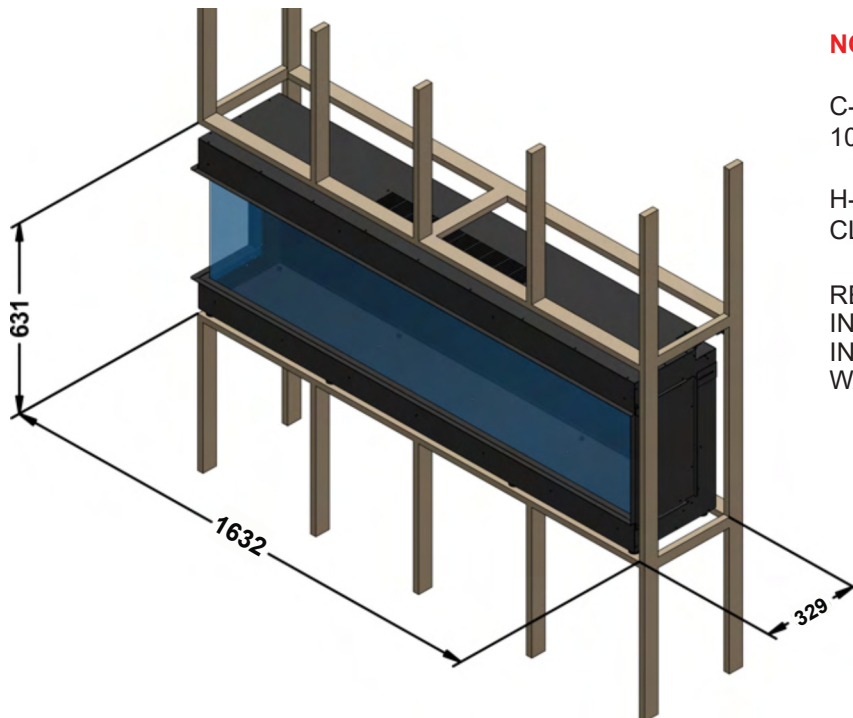**NOTES:**

C- CAVITY DEPTH INCLUDES 10MM REAR CLEARANCE.

H- HEIGHT INCLUDES 50MM TOP CLEARANCE.


REFER USER MANUAL FOR INSTRUCTION ON HOW TO INSTALL OR REMOVE THE WALL MOUNT BRACKET.

PLEASE NOTE: DIMENSIONS ARE FOR REFERENCE ONLY - CONSULT YOUR INSTALLER AND RETAILER FOR GUIDANCE

ilektro 1650 Landscape Right Corner Glass


APPLIANCE DIMENSIONS

Product Code:

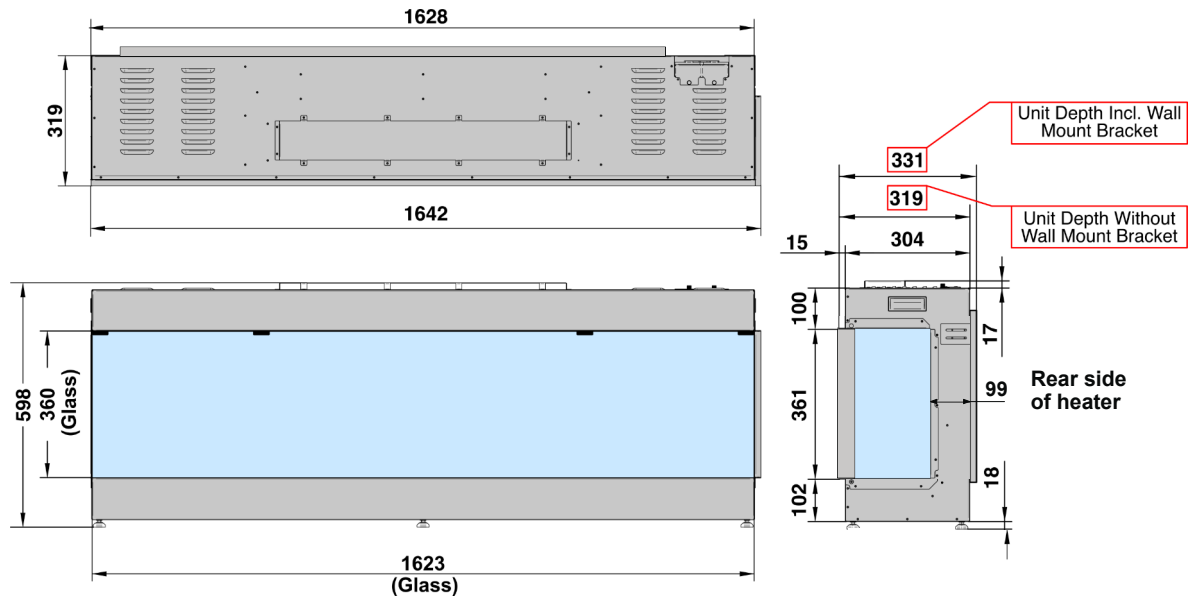

FRAME BUILD OUT DIMENSIONS (All dimensions are in millimetres)

H - MIN	W - MIN	C - CAVITY DEPTH WITHOUT WALL MOUNT BRACKET	C* - CAVITY DEPTH WITH WALL MOUNT BRACKET
631	1632	329	341

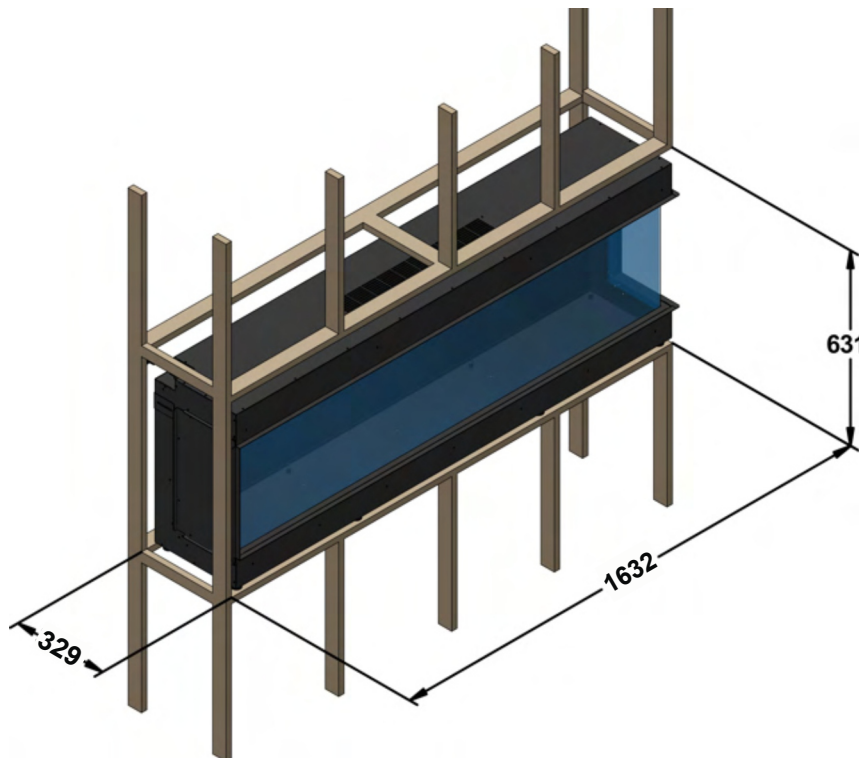

NOTES:

C- CAVITY DEPTH INCLUDES 10MM REAR CLEARANCE.

H- HEIGHT INCLUDES 50MM TOP CLEARANCE.


REFER USER MANUAL FOR INSTRUCTION ON HOW TO INSTALL OR REMOVE THE WALL MOUNT BRACKET.

PLEASE NOTE: DIMENSIONS ARE FOR REFERENCE ONLY - CONSULT YOUR INSTALLER AND RETAILER FOR GUIDANCE


ilektro 1650 Landscape

Note:

Above given dimensions are for frame structure only.

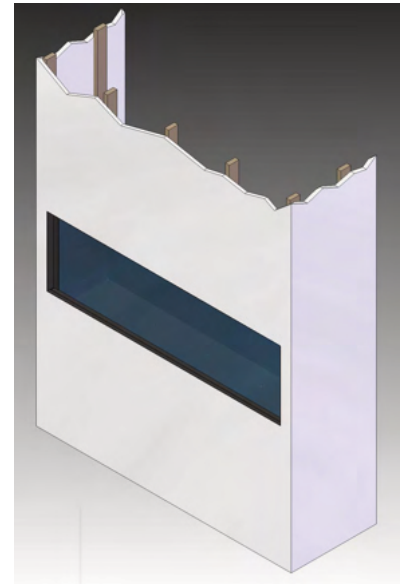


EXPLODED VIEW

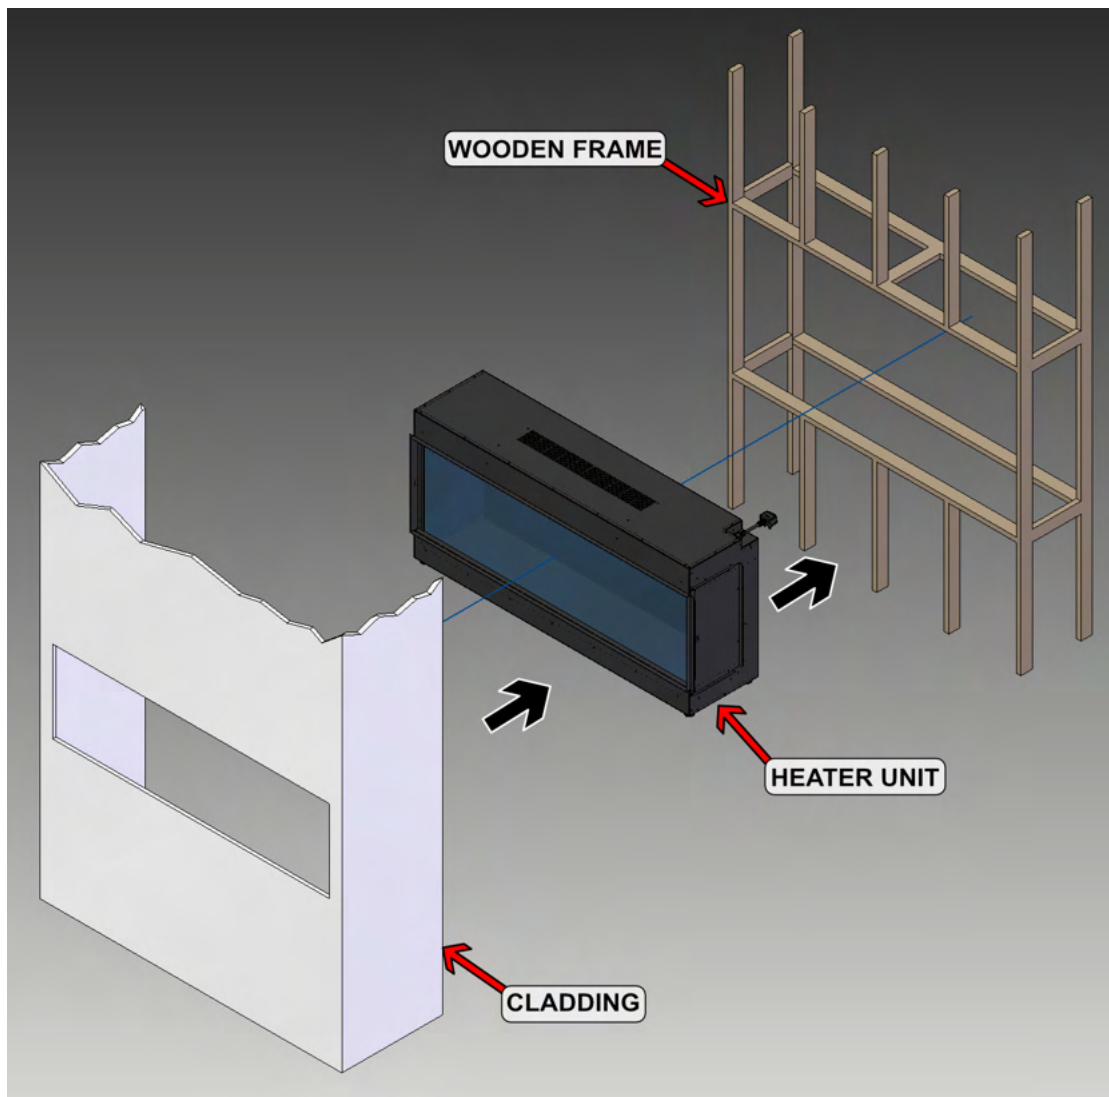

ilektrø 1650 Landscape

POSITIONING YOUR APPLIANCE

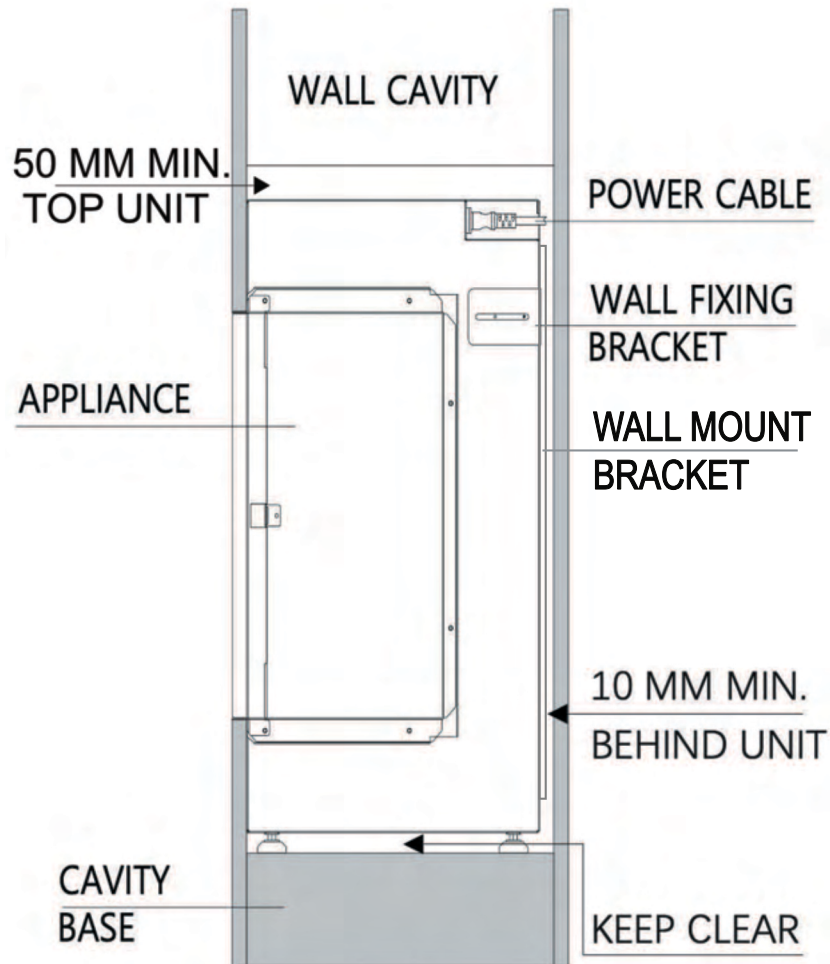

NOTE:

No fixtures are supplied to secure the appliance to the chosen wall. Ensure an appropriate fixing method is used depending on the construction material of the wall.

- When installing into a wall cavity space, a stud work enclosure should be built to house the appliance. Refer to frame out build sheet.
- Finish the enclosure in the chosen material ensuring cladding are pushed up to the edge frame around the glass of the unit.
- If your appliance is not level when installed the glass corner fit will be misaligned.

CAUTION

TELEVISION INSTALLATION MANDATORY REQUIREMENTS


When fitting a television above the fireplace the following installation must be adhered to.

Debris and dust will fall into the fan slots above the appliance causing damage unless protected. It is a requirement to set a shelf as shown below.


Option 1: Shelf to be made during framing

Option 2: Deflector plate as an accessories


CAUTION: Appliance warranty will be void if the shelf or deflector plate is not installed.

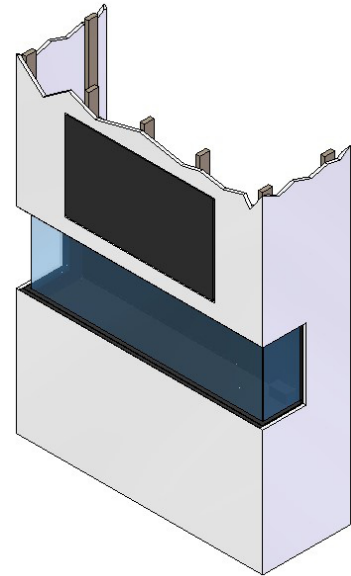

Option 1:

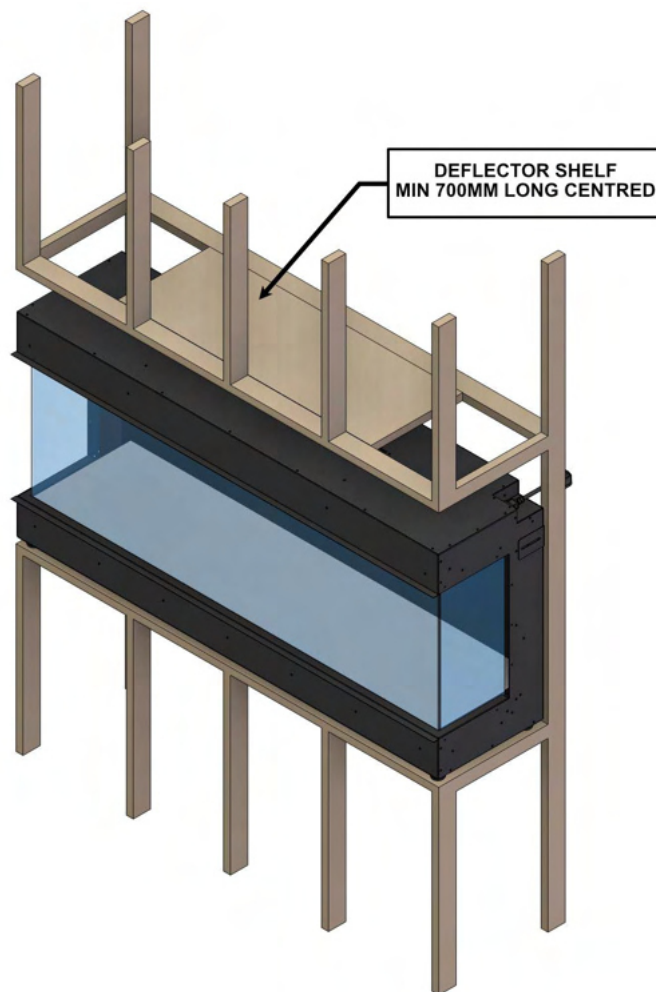

ilektro 1650 Landscape

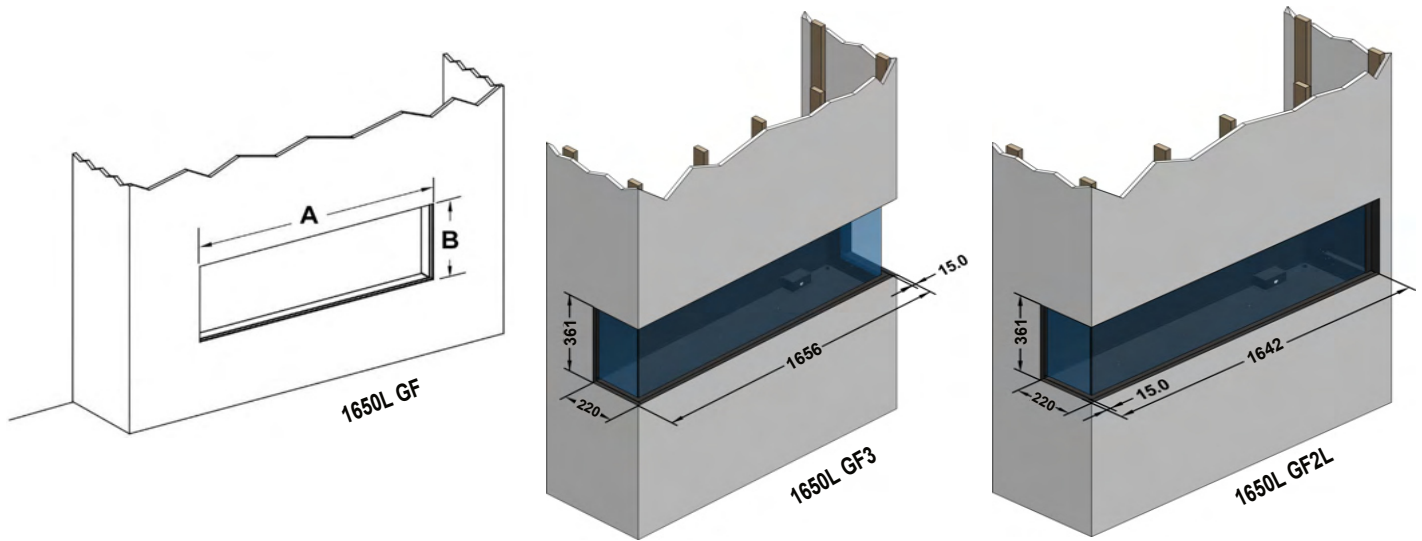

Model	A	B	C	D	E	F	G
1650L GF	1628mm	361mm	581mm	205mm	315mm	100mm	120mm
1650L GF3	1656mm	361mm	581mm	205mm	315mm	100mm	120mm
1650L GF2L	1642mm	361mm	581mm	205mm	315mm	100mm	120mm
1650L GF2R	1642mm	361mm	581mm	205mm	315mm	100mm	120mm

The above table contains the **minimum** opening

A = Width to outside of plaster flanges

B = Height to outside of plaster flanges



C = Height of fire (min)

D = Depth from front of fire body to rear of side plaster flange

E = Depth of fire (+1MM TOL) + 10mm rear clearance (without Wall mount bracket)

F = Height of fire above top plaster bead

G = Min height from underside of adjustable foot to underside of lower plaster flange

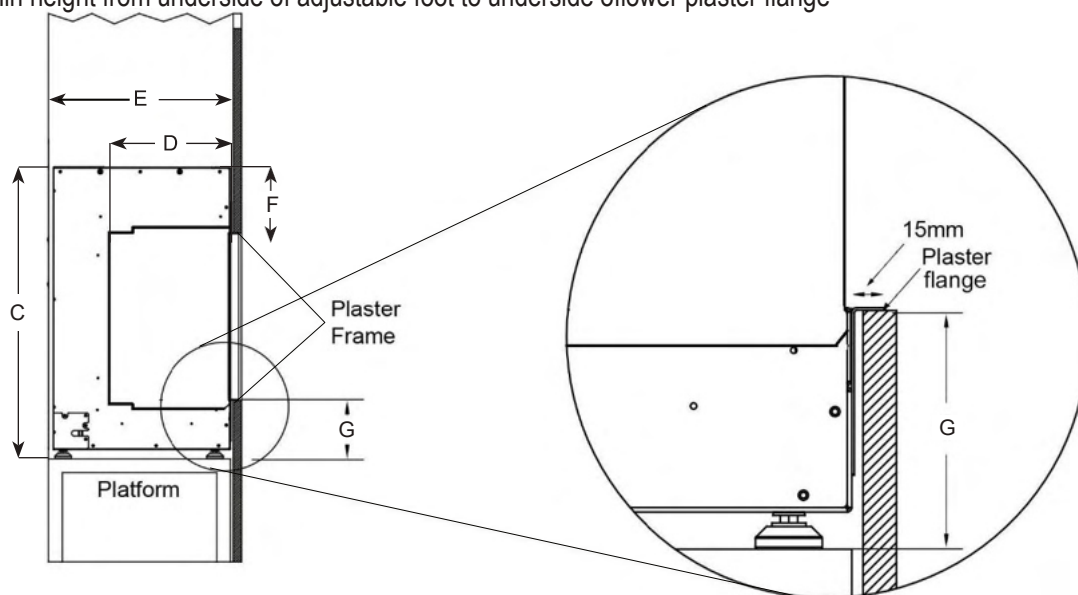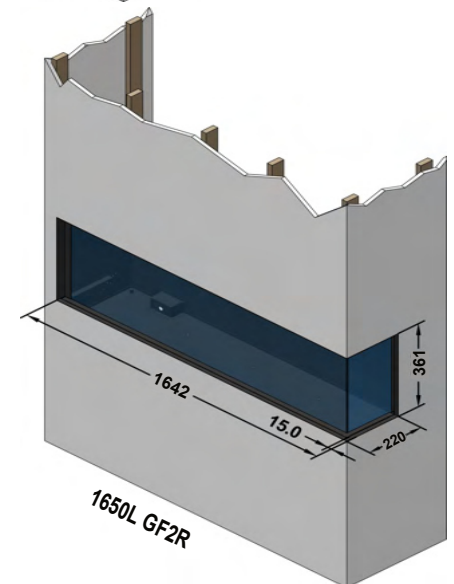

Distributed By

PAUL AGNEW | **DESIGNS**®

info@paulagnewdesigns.com | www.paulagnewdesigns.com